



SIDERISE AVC acoustic void closures for tops of walls

Semi-rigid composite sheets designed for use in small and/or irregular shaped cavities in ceiling voids to help reduce sound transmission between rooms.

Application

SIDERISE AVC acoustic void closures for tops of walls are a range of bespoke products designed to effectively close small apertures and voids encountered in a wide range of building conditions.


They are produced from a range of resilient materials or laminated composites and are intended to be compression fitted into an aperture to form an efficient acoustic seal.

Depending on the sound insulation performance required they may be employed singularly or in pairs (fitted either 'back to back' or commonly to each side of a central mineral fibre resilient infill).

Three types of closure are available, designated Type 1, Type 2 and Type 3. The type number indicates how many material layers constitute the product.

The closures are normally supplied cut to the final aperture shape but are also available in strip form (for linear gaps) or in sheet form for site cutting.

The advanced cutting techniques employed by SIDERISE to produce the acoustic void closures permit the supply of extremely complex shapes, which can include any required internal shape pieces to be cut-out. In consequence it is normally possible to create a closure to accurately match the cross-section of any aperture.

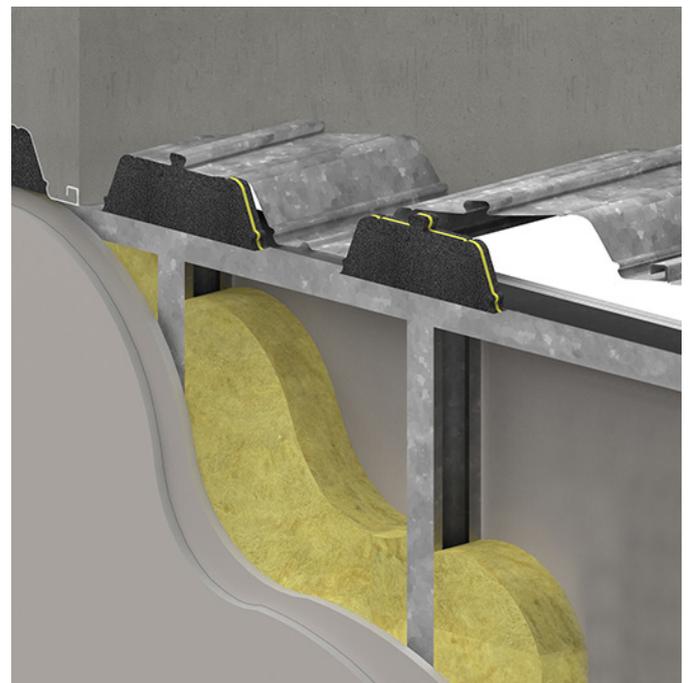

Benefits

- Acoustic performance (R_w): 35 - 44dB
- D_{nCw} up to 55dB
- Improves 'room-to-room' sound transmission
- Flexible allowing for ease of installation
- Suitable for new build and refurbishment projects

Product description

SIDERISE AVC acoustic void closures for tops of walls are available in the following three types:

Type 1 closures are produced from a resilient foam material only. Commonly made from **SIDERISE Lamacell closed cell foam**. These closures are ideal for very small apertures or situations requiring a less demanding sound insulation performance.

Type 1 may also be produced from **SIDERISE 'V' series acoustic foam** as a supporting backing infill for subsequent site application of an acoustic sealant/mastic to the surface.

Type 2 and 3 closures are produced from a laminated composite combining resilient foam/s with a flexible sound barrier membrane. Type 2 closures have resilient foam to one side of the membrane only. Type 3 closures (the most common type) comprise a resilient foam layer to both sides of the barrier membrane. Type 3 closures may employ different foams to each side.

For conditions where the closures may be partially visible, a variety of pre-applied surface finishes are available offering a range of colour options.

The type and thickness of the closure is normally selected in conjunction with our technical department. Influencing factors include:

- acoustic performance
- deformation required for fitting
- size & depth of the aperture
- dimensional variability
- shape complexity
- degree of resilience/recovery required.

[Register on our website, or contact SIDERISE, for individual data sheets on the component materials listed in the tables below.]

Table 1 - Common component materials

Component	Type 1 Closure	Type 2 & 3 Closure
Resilient foams	SIDERISE Lamacell SIDERISE 'V' series acoustic foam	SIDERISE Lamacell SIDERISE 'V' series acoustic foam SIDERISE 'M' series acoustic foam
Barrier membranes	N/A	SIDERISE BM series barrier mat: BM0050 SIDERISE BM/P series barrier mat SIDERISE L series lead foil

Table 2 - Material characteristics (Foams)

Product	Colour	Structure	Deformation rating	Robustness rating	Fire performance
SIDERISE Lamacell	Black	Closed cell	Good	Excellent	Class 'O'
SIDERISE 'V' series acoustic foam	Black	Open cell	Excellent	Good	Class 'O'
SIDERISE 'M' series acoustic foam	Light grey	Open cell	Fair	Fair	Class 'O'

Table 3 - Material characteristics (Heavy membranes)

Product	Type	Deformation rating	Recovery rating	Surface weight
SIDERISE BM series barrier mat: - BM0050	Polymeric barrier	Fair	Excellent	5kg/m ²
SIDERISE BM/P series barrier mat: - P5 - P10	Polymeric barrier	Good	Fair	5kg/m ² 10kg/m ²
SIDERISE L series lead foil: - L5 - L10	Lead foil	Excellent	Poor	5kg/m ² 10kg/m ²

Acoustic performance

The practical sound separation achieved between adjoining areas is often severely limited by 'sound leakage'. This is a condition where a sound path is created via a single or series of small apertures or gaps occurring within the separating structure.

It should be remembered that a gap as small as 1mm is considered to be very significant from an acoustic standpoint.

In practice, the sealing of such very small openings would normally be resolved by caulking with an acoustic sealant. However, when the dimension of the aperture falls outside of the working range of sealants, optimal solutions are often unclear. Frequently ad-hoc remedies are employed without an understanding as to their potential to degrade sound insulation.

The importance of gaps can be illustrated by this example: A 2.5m high wall with a SRI of 50dB has a continuous 2mm gap at the head. The effect of this gap is to reduce the SRI to 31dB (a 19dB change).

Sound leakage is not limited to unsealed gaps. Small areas within the separating structure, filled with a construction offering a substantially lower SRI value, can equally be a contributory factor to poor acoustic performance.


In relation to the previous example, if the 2mm gap is replaced with a 25mm deep mineral fibre expansion/fire stop joint with an SRI of 15dB, the effect is still to reduce the SRI to 35dB (a 15dB change).

However, if **SIDERISE AVC strips** were inserted each side of fire stop, the SRI for the joint could be raised to 40dB (as an example value), which results in only a 0.4dB reduction in the wall acoustic performance.

The final condition associated with sound leakage relates to common voids. Obvious examples such as ceiling and access floor voids are widely understood and SIDERISE provides dedicated products for these applications. However, other examples include: service ducts, perimeter heater cases, continuous lighting trays and air diffusers. Whilst often small in area they have the potential to substantially reduce sound separation. They also frequently have complex internal cross-sections making effective closure very difficult. The use of **SIDERISE AVC** represents a simple and reliable solution to resolving these problem areas.

A wide range of SRI values are achievable using **SIDERISE AVC**. The graph below indicates performance for a pair of Type 3 closures with a gap of 75mm and provides an SRI of 44dB (R_w).

Graph 1 - SRI performance values

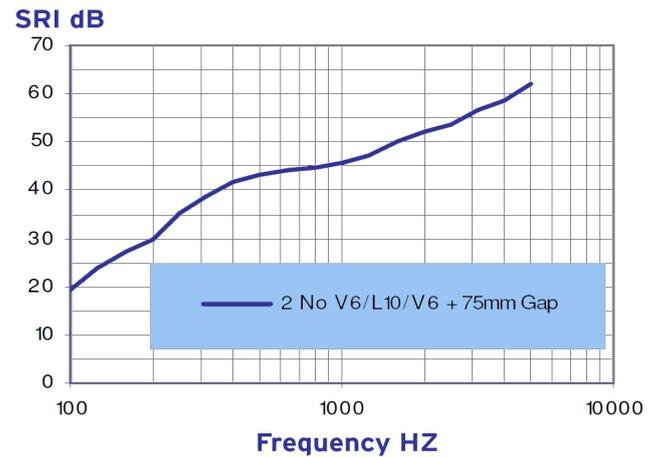

Our Interiors technical team can advise on typical values against specific conditions.

Options

SIDERISE AVC acoustic void closures can be employed in a wide range of applications within the construction industry. They are suitable for both refurbishment and new build projects

The following key features give rise to the product's diversity of use:

- Wide range of product make-ups.
- Can be used singly or in multiples.
- Can be combined with other materials, e.g. mineral fibre or mastic coatings.
- Suitable for a wide range of aperture sizes: minor dimension 10 - 500mm, major dimension unrestricted.

Common application include:

- Infills to profiled decks
- Deflection joints & fire stops
- Metal grid & frame section infills
- Closures for service ducts, perimeter heater cases, continuous lighting trays, blind boxes & air diffusers.

Examples

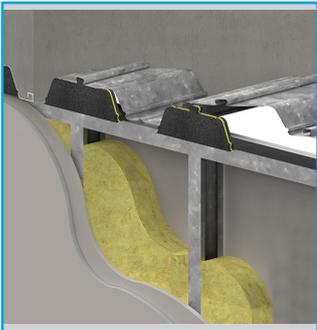


Fig 1. Profiled deck/Top of Wall junc.



Fig 2. Continuous lighting trays

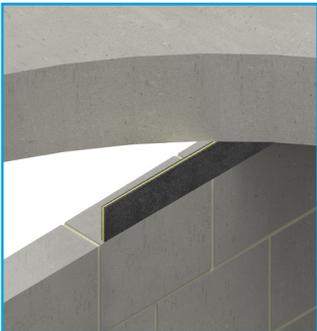


Fig 3. Deflection/Fire seal at top of wall

PROFILED DECK/TOP OF WALL JUNCTION

A common condition where a partition or wall meets the underside of a profiled metal deck resulting in the need to fill a series of trapezoidal apertures. Frequently there is an additional requirement to fire stop these voids.

The normal solution is to fit **SIDERISE AVC Type 3** each side of a central profiled mineral fibre insert (**SIDERISE firesafe insulation inserts** are used when fire performance is also required.)

The pre-cut closures exactly match the section of the deck including ribs and small radius bends. The grade of closure is selected with reference to the sound insulation requirement.

CONTINUOUS LIGHTING TRAYS

Continuous lighting trays passing directly over partition lines have traditionally been extremely difficult to treat. Limited access combined with a complex internal shape often result in a failure to achieve an effective acoustic seal above the partition.

As **SIDERISE AVC** is flexible the closures may be severely distorted during the fitting process, but once in their final position can be straightened easily with finger pressure to close the aperture. Fig 2. illustrates a typical complex closure for a lighting tray.

DEFLECTION/FIRE SEAL AT TOP OF WALL

A linear seal condition where a resilient mineral fibre fire stop material is inserted between the top of the wall and the soffit.

Such infills have relatively low SRI values (15-25dB). Compression fitting **SIDERISE AVC Type 3** in strip form to both sides of the fire stop material greatly enhances the SRI (values in the range 35 - 45dB are achievable).

For large deflections the closures can be securely retained top and bottom by metal angle sections.

Technical specification

SIDERISE AVC flexible acoustic void closures for tops of walls

Form supplied	Die-cut to suit profile or cut strip (full sheets available for strip use)
Colour	Black (other colour options available subject to minimum quantities)
Thickness (mm)	Type 1 - 12 to 50 Type 2 - 18 Type 3 - 30
Surface weight (kg/m²)	Type 1 - 1 to 4 Type 2 - 6 to 12 Type 3 - 6 to 12
Central mass membrane (kg/m²)	Type 1 - none Type 2 - 5 or 10 Type 3 - 5 or 10
Fire performance	Class '0'



Further information

PRODUCTS AVAILABLE

The following SIDERISE products for use in suspended ceiling voids are available and can also be specified using NBSPlus:

- SIDERISE AVC acoustic void closures for tops of walls
- SIDERISE FLX flexible acoustic barriers
- SIDERISE CBX flexible acoustic barriers
- SIDERISE CVB (CVB/LAM, CVB/P) acoustic void barriers
- SIDERISE SC cavity barriers and fire stops
- SIDERISE TW fire stops for profiled decks
- SIDERISE foil tape: FT 120/45

Contact us for a copy of our SIDERISE ceiling void barrier range brochure.

AVAILABLE CPDS

Contact SIDERISE for further information on our CPDs:

- SIDERISE CVB range: Use and Specification for the Suspended Ceilings Industry
- SIDERISE Acoustic Products & Performance - Information for Noise Consultants

Technical & sales support

SALES SUPPORT

Internal Sales Team

T: +44 (0) 1656 730833

E: sales@siderise.com

Andrew Stanley

National Accounts Manager - Interiors UK

M: +44 (0) 7770 533759

E: andrew.stanley@siderise.com

TECHNICAL SUPPORT

Mike Carrick AMIOA

Technical Officer - Construction Acoustics

M: +44 (0) 7917 327797

E: mike.carrick@siderise.com

Chris Mort

Technical Officer - Fire

M: +44 (0) 7778 691510

E: chris.mort@siderise.com

SITE SUPPORT

Barnaby Carrick

Technical Applications Engineer

M: +44 (0) 7467 955120

E: barnaby.carrick@siderise.com



SIDERISE GROUP

Forge Industrial Estate,
Maesteg, UK, CF34 0AY

T: +44 (0)1656 730833

F: +44 (0)1656 812509

E: interiors@siderise.com

W: www.siderise.com

